





6-FMJ-50 discharge characteristics(25°C)						
Time	discharge to 11.1V		discharge to 10.5V		discharge to 9.9V	
	constant current(A)	constant power(W)	constant current(A)	constant power(W)	constant current(A)	constant power(W)
2min	304.50	3366.00	392.00	3672.00	462.00	3930.00
5min	203.00	2286.00	243.00	2520.00	283.00	2754.00
10min	153.00	1686.00	168.00	1884.00	181.00	2100.00
15min	119.00	1344.00	127.00	1416.00	138.00	1584.00
20min	95.00	1116.00	108.00	1224.00	113.50	1272.00
30min	67.50	804.00	72.00	852.00	78.00	876.00
45min	52.00	576.00	54.00	618.00	55.50	624.00
1h	39.00	468.00	42.00	486.00	43.00	492.00
2h	21.00	252.00	22.00	270.00	22.50	264.00
3h	17.00	204.00	16.00	204.00	17.50	198.00
4h	14.00	156.00	13.00	150.00	12.50	168.00
5h	10.00	132.00	11.00	120.00	11.00	132.00
8h	7.00	84.00	7.00	84.00	7.00	84.00
10h	6.00	72.00	6.00	66.00	6.00	72.00
20h	2.90	36.00	2.90	30.00	2.90	30.00


### Influences of temperature on battery Capacity

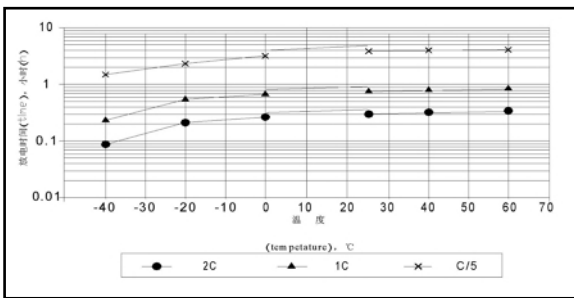

### Cycle service life in relation to DOD

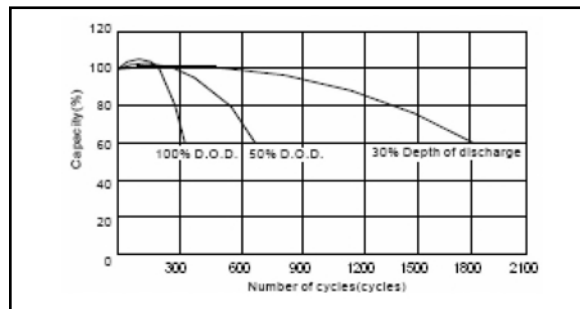

### Constant current discharge performance at 25°C

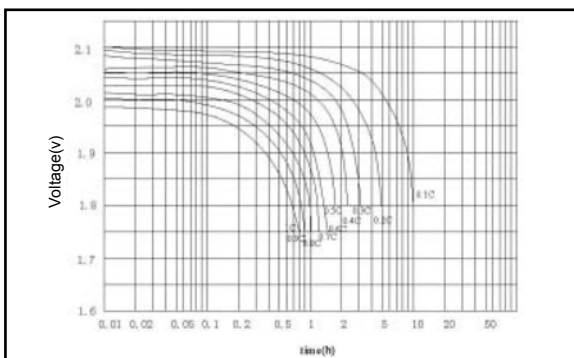

### Different depth of charge-discharge characteristic curve

